


USB CRADLE DATALOGGER



Temperature Datalogger (Interface: Cradle) w/LCD:8828, 8814, 8815,8834,88345 w/o LCD:88128,8813,8833,88335

- Display & record real time temperature
- 2 ways to program & download data:
 - 1) via PC: USB cradle
 - 2) via logger printer 9801: 9801 is a 3 function in 1 printer for programing & download
- Yellow LED: recording indicator ; Red LED flash while exceeding threshold
- Several methods to start recording:
 - 8813,8814,8815:button/schedule /immediately
 - 8833,8834,88335,88345:button/schedule /immediately/repeat/on line
 - 8828,88128:magnet/schedule/immediately

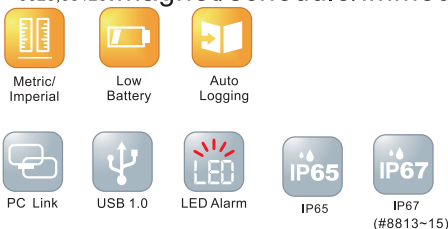

Model	8828	8813 8814 8815	8834	88345
	88128		8833	88335
Air temp. range	-40~85°C	-30~70°C	-40~85°C	
Air temp. resolution	0.1°C/°F			
Air temp. accuracy	+/-0.6°C (-20~50°C), others +/-1.2°C			
External temp. range	N/A	N/A	-40~100°C	10~150°C
External temp. Accuracy	N/A	N/A	+/-0.6°C (-20~50°C), others +/-1.2°C	+/-0.8°C (10~50°C), +/-1.6°C (50~100°C), +/-3°C at others
Sampling points	16000	4000 4000 8000	8000	8000
Button to on/off	N/A	YES	YES	YES
Battery life time	>9 MONTHS	>3 MONTHS	>6 MONTHS	
LCD size (mm, HxW)	w/LCD:8828, 8814, 8815, 8834, 88345 --> 12*25.5 w/o LCD:88128, 8813, 8833, 88335 --> N/A			
Operating temp.	0~50°C			
Operating RH%	Humidity < 80%			
Storage temp.	-20~50°C			
Storage RH%	Humidity < 90%			
Dimension(mm,LxWxT)	80x55x22	80x55x22	72x56x21	
Weight	~70g	~70g	~70g	
Battery	ER3 x 1pc	CR2032 x 1pc	ER3 x 1pc	
Logger activation	-8828/128: magnet/schedule /immediately start -8813/14/15:button/ schedule /immediately start -8833/335/34/345:button/schedule/immediately/repeat/on line start			
Standard Package	Meter/Battery/Manual/Paper box			
Optional Accessory	External probe / Cradle kit /9801 printer			

Ordering Code

VZ8828AZ, 8828 logger
 VZ8833AZ, 8833 logger
 VZ8834AZ, 8834 logger
 VZ8813AZ, 8813 logger
 VZ8815AZ, 8815 logger
 VZ981PAZ, high temp. Probe for 88335/88345
 VZ8824AZP, Logger PC kit
 VZ9801AZ, Printer set
 VBER3SA0, ER3 Li battery

VZ88128AZ, 88128 logger
 VZ88335AZ, 88335 logger
 VZ88345AZ, 88345 logger
 VZ8814AZ, 8814 logger
 VZ87P6AZ, Thermistor probe



USB INTERFACE
 P/N:VZ8824AZP :
 USB 1.0 interface
 Size : 85 *61 * 20.2 mm



3 IN 1 DATALOGGER PRINTER
 P/N:VZ9801AZ
 USB connector to pc
 Logger connect to printer via direct metal point contact



EXTERNAL TEMP. PROBE
 P/N:VZ87P6AZ (FOR 8833,8834)
 P/N:VZ981PAZ (FOR 88335,88345)
 Color: black
 Size:15cm probe w/handle
 Cable: 116cm w/2.5mm jack